


FITTINGS / Style 02 - 02D - 41

GROOVED-END FITTINGS

Maximum working pressure: 34.5 bar
For fire protection equipment and approved pressure ratings please contact Modgal.

STYLE 02

End-Cap / Endkappe / Eindkap

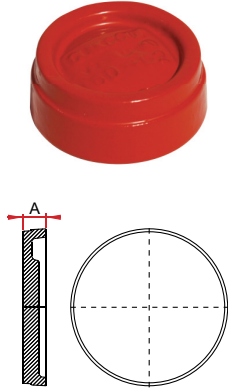


Nominal Size (Inches / DN)	Pipe Outside Diameter	Dimension		Weight Kg.	Approvals
		A			
1¼" / 32	42.4	24.0	0.13	FM / UL LPCB / VDS	
1½" / 40	48.3	25.0	0.16	FM / UL LPCB / VDS	
2" / 50	60.3	24.0	0.21	FM / UL LPCB / VDS	
2½" / 65	76.1	25.0	0.36	FM / UL LPCB / VDS	
3" / 80	88.9	25.0	0.50	FM / UL LPCB / VDS	
4" OD	108.0	27.0	0.72	FM / VDS	
4" / 100	114.3	28.0	0.76	FM / UL LPCB / VDS	
5" OD	133.0	26.0	1.39	FM / VDS	
5" / 125	139.7	27.0	1.38	FM / UL LPCB / VDS	
6" OD	159.0	27.0	1.38	FM / UL VDS	
6" OD	165.1	27.5	1.57	FM / LPCB VDS	
6" / 150	168.3	26.0	1.70	FM / UL LPCB / VDS	
8" / 200	219.1	31.0	3.70	FM / UL LPCB / VDS	
10" / 250	273.0	34.0	6.47	FM / UL VDS	
12" / 300	323.9	34.0	9.20	UL	
14" / 350	355.6	38.0	28.90	-	
16" / 400	406.4	38.0	37.60	-	

FITTINGS MIT GERIEFTEN ANSCHLUSS

Maximaler Betriebsdruck: 34.5 bar
Die Brandschutzzulassungen und die Zulassungs-nenn-drücke erhalten Sie bei Modgal.

STYLE 02D

End-Cap with Drain / Endkappe mit Anschluss / Eindkap mit Drain

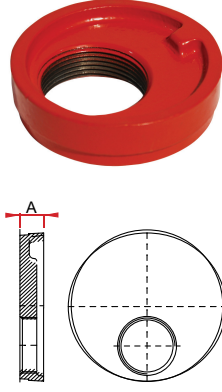

Nominal Size (Inches / DN)	Pipe Outside Diameter	Out- let	Dimension		Weight Kg.	Approvals
			A			
1¼" / 32	42.4	-	-	-	-	-
1½" / 40	48.3	-	-	-	-	-
2" / 50	60.3	1"	25.0	0.27	VDS	
2½" / 65	76.1	1½"	25.0	0.40	FM / VDS	
3" / 80	88.9	1½"	25.0	0.50	FM / UL VDS	
4" OD	108.0	1½"	26.0	0.84	FM / UL VDS	
4" / 100	114.3	1½"	27.0	0.90	FM / UL VDS	
5" OD	133.0	1½"	26.0	1.12	FM / VDS	
5" / 125	139.7	1½"	26.0	1.35	FM / VDS	
6" OD	159.0	1½"	26.0	1.35	FM / UL VDS	
6" OD	165.1	1½"	26.0	1.95	FM / UL	
6" / 150	168.3	1½"	26.0	1.94	FM / UL VDS	
8" / 200	219.1	1½"	30.0	3.83	FM / UL VDS	
10" / 250	273.0	-	-	-	-	
12" / 300	323.9	-	-	-	-	
14" / 350	355.6	-	-	-	-	
16" / 400	406.4	-	-	-	-	

GEGROEFDE FITTINGEN

Maximale werkdruk: 34.5 bar
Contacteer Modgal voor toegelaten druk-
klassen voor brandbeveiligingstoepassingen.

STYLE 41

Elbow 11¼° / Bogen 11¼° / Bocht 11¼°



Nominal Size (Inches / DN)	Pipe Outside Diameter	Dimension		Weight Kg.	Approvals
		A			
1¼" / 32	42.4	35.0	0.26	FM	
1½" / 40	48.3	35.0	0.31	FM	
2" / 50	60.3	35.0	0.40	FM	
2½" / 65	76.1	38.0	0.60	FM	
3" / 80	88.9	38.0	0.91	FM	
4" / 100	114.3	44.0	1.20	FM	
5" / 125	139.7	51.0	2.00	FM	
6" OD	165.1	51.0	3.16	FM	
6" / 150	168.3	51.0	3.10	FM	
8" / 200	219.1	51.0	4.20	FM	

For use with higher than stated maximum working pressure, please contact Modgal Metal.

Für den Einsatz mit höheren Drücken, als dem angegebenen maximalen Betriebsdruck, kontaktieren Sie bitte Modgal Metal.

Voor gebruik met hogere dan aangegeven maximale werkdruk, neem a.u.b. contact op met Modgal Metal.